



API Reference Guide

sortspoke.com

last updated: 2025-01-02

© 2024 SortSpoke

All Rights Reserved. No part of this publication (printed or electronic) may be reproduced, translated, stored in a retrieval system or transmitted, in any form or by any means whether electronic, mechanical, photocopying, or otherwise, without the prior written permission of SortSpoke and may only be used in accordance with the terms of the license agreement. If this software or documentation directs you to copy materials, you must have permission from SortSpoke to avoid violating the law which could result in damages or other remedies.

No warranty of accuracy is given concerning the contents of the information contained in this publication. To the extent permitted by law no liability (including liability to any person by reason of negligence) will be accepted by SortSpoke, its subsidiaries or employees for any direct or indirect loss or damage caused by omissions from or inaccuracies in this document.

SortSpoke reserves the right to change details in this publication without notice.

Table of Contents

Table of Contents	2
Purpose of this Document	4
SortSpoke API Overview	5
Authorization	6
Projects	7
Get Projects	7
Get Labels	8
Get Fields	10
Upload Files	12
Sourcefiles	14
Get Sourcefile Status	14
Get Sourcefile Documents	16
Mark Sourcefile Delivered	18
Documents	19
Get Document Status	19
Get Document List	20
Get Sibling Documents	23
Mark Document Delivered	24
View Finished Document	26
Split	27
Split Sourcefile	27
Named Batches	29
Create Batch	29
Upload File to Batch	31
Assign Batch	33
Update Batch Status	34
Get Batches List	35
Get Document List for Batch	38
Mark Batch Delivered	40
Downloads	41
Document Export (JSON)	41
Document Export (Excel)	44
Bulk Export (JSON)	45
Bulk Export (Excel)	46

Original Document (PDF)	47
Batch Export (JSON)	48
TriageAI	50
Get Triage Results	50
Rerun Triage	52
Get Buckets	53
Assign Bucket	55
Lookup Data	56
Get Lookup Schemas	56
Create Lookup Schema	58
Replace Lookup Schema	59
Append Lookup Schema	60
Delete Lookup Schema	62
Conventions	63
API Status Codes	63
SortSpoke Status Codes	64
Documents	64
Sourcefiles	66
Batches	67
What is Postman?	68
Postman Configuration	68
Download Setup Files	68
Import Setup Files	69
Set Your Variables	69
Send Your First API Call	71
Authorization Setup	71

Purpose of this Document

This document is intended as an overview of, and reference guide for, the SortSpoke API. This guide includes a high-level description of the SortSpoke API, common use cases for the SortSpoke API, and detailed information on how to work with the SortSpoke API.

SortSpoke API Overview

The SortSpoke API is a RESTful API that allows you to access features of SortSpoke using standard methods.

The core functionality of the SortSpoke API is to upload PDF documents and download JSON output files. This document describes some of the common use cases and provides you the resources for integrating SortSpoke into your app.

This document is updated frequently as new features are developed. New fields may be added to the response output while maintaining backwards compatibility. When parsing responses, ensure that you can accept JSON data that may contain additional fields in the future. These additional fields can be safely ignored unless you choose to take advantage of new functionality.

Authorization

Key	Value
Authorization	Bearer <code>TOKEN_STRING</code>

Authorization header with bearer token must be sent with all client requests. The secret bearer token is obtained through separate out-of-band channels.

If you are a SortSpoke Administrator you can [generate your API Token](#) directly in SortSpoke. Alternatively, please contact your administrator(s) directly to obtain or request changes to your secret bearer token.

Common Use Cases

Projects

Get Projects

Get the list of projectIds for an account.

Request

Method	URL
GET	api/v2/projects

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Query	expanded	int	[optional] A value of '1' will return additional project information including Project Name.

Response

The response contains the list of projectIds that are used to refer to the specific **Project** in subsequent API calls.

Status	Response
200	["8a86f3f4-8ead-11e8-970b-01290c080815", "8a87f3d3-8ead-12e4-970b-01290c080816", "8a87f3c7-8ead-19e2-970b-01290c080817",]
400	Bad request
401	Unauthorized

Get Labels

Get document **Categories** (labels) for a project.

Request

Method	URL
GET	api/v2/projects/{projectId}/labels

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	projectId	string	ProjectId that the uploaded document belongs to. Must be sent as part of the route.

Response

The response contains the list of **Categories** (labels), used to refer to the specific (category) label under the project.

Status	Response
200	<pre>{ "projectId": "8a86f3f4-8ead-11e8-970b-01290c080815", "acctId": "5r8b6060-4082-37ri-g64r-fa37023e8e90", "legacyUserId": "test@test.com", "labels": [{ "labelId": "1de7e534-dacc-11e6-811f-5b1e17wp1c4f", "name": "Lease" }, { "labelId": "f621e24e-ee7b-12e6-811f-5b1e30ew1c9t", "name": "Lease Addendum" }] }</pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
------	-----------	-------------

API Reference Guide

projectId	string	ProjectId that the uploaded document belongs to.
accId	string	Account Id that project belongs to.
legacyUserId	string	Unique identifier of the user who created the label.
labels	Array	List of labels related to the specified project.

Get Fields

Get **Field(s)** belonging to the specified **Category** (label).

Request

Method	URL
GET	api/v2/projects/{projectId}/labels/{labelId}/fields

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	projectId	string	ProjectId that the uploaded document belongs to. Must be sent as part of the route.

Response

The response contains the list of **Field(s)**.

Status	Response
200	<pre>{ "labelId": "1de7e538-dccb-11e6-811f-5b1e23ea1c4f", "acctId": "5r8b6060-4082-37ri-g64r-fa37023e8e90", "projectId": "8a86f3f4-8ead-11e8-970b-01290c080815", "fields": [{ "fieldId": "15e4c5e9-6816-11e7-8120-5b1e23ea1c4f", "name": "Heading", "isRequired": false, "isColumn": false, "isMulti": false, "validationType": null, "customValidationRegex": null }, { "fieldId": "15e4c5e9-6816-11e7-8120-5b1e23ea1c4f", "name": "Lessor", "isRequired": false, "isColumn": false, "isMulti": false, "validationType": null, "customValidationRegex": null }] }</pre>

API Reference Guide

400	Bad request
401	Unauthorized

Name	Data Type	Description
labelId	string	Label id that the field belongs to.
acctId	string	Account Id that project belongs to.
projectId	string	ProjectId that the uploaded document belongs to.
fields	Array	List of fields related to the specified project and label.

Upload Files

Files can be uploaded to SortSpoke directly for ingestion.

Files must have valid & accurate file extensions to be ingested successfully. Supported file types: pdf, bmp, gif, jpg, png, tif, doc/docx, xls/xlsx, ppt/pptx.

Request

Method	URL
POST	api/v2/projects/{projectId}/upload
POST	api/v2/streams/{streamId}/upload

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	projectId	string	ProjectId to which the uploaded document should be added. Documents will be added to the Default Stream.
Route	streamId	string	StreamId to which the uploaded document should be added. Can target default and custom streams.
Query String	uploadPath	string	[optional] Specify a virtual folder to upload the file to (e.g. “/inbox/a@a.com”). If not provided: <ul style="list-style-type: none"> - When a user is specified, the upload path will default to the user’s queue. - When a user is not in context, the path will default to the default queue.
Query String	labelId	string	[Optional] Sorts a document to a specific document category. When batched to a user, the document will advance automatically to the Extract tab.
Body	file	multipart/form-data	Document data in binary form. 200MB limit per request. Supported types: PDF, JPG, GIF, BMP, PNG, TIF, DOC, DOCX, PPT, PPTX, XLS, XLSX.

Samples

Method	Sample (C#)
POST	{url}/api/v2/projects/{projectId}/upload?uploadPath=user@domain.com&labelId={labelId}
POST	{url}/api/v2/projects/{projectId}/upload?labelId={labelId}

API Reference Guide

Response

The response contains the unique DocId of the uploaded that is used to refer to the **Document** in subsequent API calls. It also contains a file name and the size (length) of the uploaded file.

Status	Response
200	<pre>[{ "docId": "3gedef-dftrw4-gs4gfdgd-44etegre", "filename": "/username@domain.com/filename.pdf", "size": 1000, "sourceFileId": "cecf5abb-9ecf-11ea-8275-5793c2ae4c49" }]</pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
docId	string	Document unique identifier generated by the system.
filename	string	Original source file name.
size	int	Document source file size (length).
sourceFileId	string	SourceFile unique identifier generated by the system.

Sourcefiles

Get Sourcefile Status

Gets status for a **source file**.

Request

Method	URL
GET	api/v2/sourceFiles/{sourcefileId}/status

[Authorization](#) header must be sent with this request.

Parameters

Type	Params	Values	Description
Route	sourcefileId	string	Sourcefile unique identifier generated by the system. Must be sent as part of the route.

Response

The response contains details for the source file. Note: **State 300** indicates a source file & all child documents are in a 'finished' state.

Status	Response
200	<pre>{ "sourcefileId": "c5625287-d1ae-11ea-820d-57643572dda7", "projectId": "dd3d1392-6e7c-11e8-81ec-5f095ac7119a", "state": 300, "sourcefileName": "sourcefile_name.pdf", "pageCount": 8 }</pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
sourcefileId	string	Source file unique identifier generated by the system.
projectId	string	Unique identifier for Project to which the record belongs.
state	string	Status of the source file.

API Reference Guide

sourceFileName	string	Original source file name.
pageCount	string	Number of pages in the source file.

Get Sourcefile Documents

Get a list of all child **document(s)** of a source file.

Request

Method	URL
GET	api/v2/sourceFiles/{sourcefileId}/docs

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	sourcefileId	string	Source file unique identifier generated by the system.

Response

The response contains the list of **Documents**, found under the project.

Status	Response
--------	----------

API Reference Guide

200	<pre>[{ "docId": "c5625288-d1ae-11ea-820d-57643572dda7", "labelId": "9700eab9-eed6-11e8-8236-5f1a72b316fe", "state": 7, "sourcePages": [{ "docPageNum": 1, "sourceFileId": "c5625287-d1ae-11ea-820d-57643572dda7", "sourceFilePageNum": 2 }] }, { "docId": "ea626dee-d1ae-11ea-820d-57643572dda7", "labelId": "9700eab9-eed6-11e8-8236-5f1a72b316fe", "state": 7, "sourcePages": [{ "docPageNum": 1, "sourceFileId": "c5625287-d1ae-11ea-820d-57643572dda7", "sourceFilePageNum": 7 }, { "docPageNum": 2, "sourceFileId": "c5625287-d1ae-11ea-820d-57643572dda7", "sourceFilePageNum": 10 }] }]</pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
docId	string	Document unique identifier generated by the system.
labelId	string	The labelId of the Category the file was processed in.
state	string	Status of the document.
sourcePages	Array	List of source file pages in the document.
docPageNum	string	Page number in document.
sourceFileId	string	Source file unique identifier generated by the system.
sourcePageNum	string	Page number in source file.

Mark Sourcefile Delivered

Advance *finished* sourcefiles and related *finished* documents to 'Delivered' status to indicate that exports have been received.

Request

Method	URL
POST	/api/v2/sourcefiles/deliver

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Body	sourcefileIds	array	Source file unique identifier generated by the system.

Response

Status	Response
200	OK
400	Bad request
401	Unauthorized

Documents

Get Document Status

Get **Document(s)** status.

Request

Method	URL
POST	api/v2/status

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Values	Description
Body		[string, string]	An array of docIds.

Response

The response contains the list of **Documents** with corresponding statuses. Note: Document State 7 indicates a document is ready for download/export.

Status	Response
200	[{ "DocId": "r4fefwafw-fwfes4-f3wafasefqa-ggsfw3f", "DocumentState": 7, "AutoAccepted": true }, { "DocId": "r4fefwafw-fwfes4-f3wafasefqa-ggsfw3c", "DocumentState": 4, "AutoAccepted": false }]
400	Bad request
401	Unauthorized

Get Document List

Get a list of **Document(s)** for a project.

Request

Method	URL
POST	api/v2/projects/{projectId}/docs/list
POST	api/v2/streams/{streamId}/docs/list

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	projectId	string	ProjectId for which all documents should be returned. Will return data for the Default Stream.
Route	streamId	string	StreamId for which all documents should be returned. Can specify default or custom streams.
Body	Query	["string"]	[optional] Search for a string of text. Matches records that start with specific string.
Body	StateFilter	"StateFilter": { "FilterValues":[7,8] },	[optional] Status of the Document (see Document Status Codes for reference)
Body	LabelFilter	"LabelFilter": { "FilterValues":["90e44661-5ad6-11e9-81f2-53ce62da45da"],	[optional] The labelId of the Category the file was processed in.
Body	DateFilter	"DateFilter": { "FromCreationDate": "2022-01-01", "ToCreationDate": "2022-12-31T15:45" }, { "FromFinishedDate": "2022-02-01", "ToFinishedDate": "2022-12-31T15:45" }, { "FromExportedDate": "2022-02-01", "ToExportedDate": "2022-02-31T15:45" },	[optional] Search for documents with an CreationDate/ExportedDate/FinishedDate in the defined date range. Time defaults to 00:00 if not specified.

API Reference Guide

Body	Limit	<code>"Limit":1000,</code>	[optional] Maximum number of results to return (1000 max.)
Body	PageNumber	<code>"PageNumber":1,</code>	[optional] Page number provides you a way to see more than the first 1000 results.
Body	Sorting	<code>"Sorting": [{ "FieldName" : "FinishedDate", "Type" : "Descending" }]</code>	[optional] Specify the sort type & order of the output.

Response

The response contains the list of **Documents** found under the project.

Status	Response
200	<pre>{ "itemCount": 1, "pageSize": 1000, "pageCount": 1, "offset": 0, "data": [{ "docId": "3cf66840-5af6-11e9-81f2-53ce62da45da", "sourceFileId": "205977d2-6082-11e9-81fd-5f258a7bb38a", "containerSourceFileId": "926e37a0-a14e-ef11-af10-5f9008cd344c", "batchId": "4c445c7f-54a1-11e9-81f4-575caa4fcc86", "state": 7, "documentName": "filename.pdf", "pageCount": 2, "creationDate": "2019-04-09T18:35:25.337Z", "assignee": "user@domain.com", "uploadedBy": "user@domain.com", "documentSearchProjectLabel": { "labelId": "90e44661-5ad6-11e9-81f2-53ce62da45da", "name": "labelName", "deleted": false }, "rejectionReason": null, "exportedDate": "2019-04-09T19:07:11.336Z", "finishedDate": "2019-04-09T19:07:12.478Z", "rejectedDate": "0001-01-01T00:00:00Z", "virusScanFailed": false }] }</pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
itemCount	string	The total number of files returned.

API Reference Guide

pageSize	string	The limit of the number of results.
pageCount	string	The total number of pages of results.
offset	string	Relates to Limit and PageNumber.
searchTooManyResults	boolean	Indicates if too many results returned when searching by query string. Max. 1000 documents.
data	array	List of documents related to the project.
docId	string	Document unique identifier generated by the system.
sourcefileId	string	Source file unique identifier generated by the system.
containerSourcefileId	string	Unique identifier generated by the system referencing the source file parent of doc-source file set.
batchId	string	Unique identifier of a batch of documents assigned to one user.
state	string	Status of the document.
documentName	string	Name generated for doc based on source file name.
pageCount	string	Number of pages in the source file.
creationDate	string	Document upload date.
assignee	string	User who exported the source file.
uploadedBy	string	User who imported the source file.
documentSearchProjectLabel	array	List of characteristics of Category in which document has been sorted.
labelId	string	The labelId of the Category the file was processed in.
name	string	Name of the Category the file was exported from.
deleted	string	Indicates if the Category [labelId] in file was in has been deleted.
rejectionReason	string	User-entered reason for rejecting a document.
exportedDate	string	Document exported date.
finishedDate	string	Document finished date.
rejectedDate	string	Document rejected date.
virusScanFailed	boolean	Indicates result of anti-virus scan of source file.

Get Sibling Documents

Get a list of all **sibling documents** sharing a parent source file.

Request

Method	URL
GET	api/v2/docs/{docId}/siblings

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	docId	string	Document unique identifier generated by the system.

Response

The response contains the list of **sibling documents** sharing a parent source file.

Status	Response
200	<pre>[{ "containsVerifiedFields": true, "containsComments": false, "ownedByCurrentUser": false, "ownedByCurrentUserInDifferentBatch": false, "docId": "caa7616a-e7bc-11ea-8224-57643572dda7", "labelId": "b7222272-e259-11ea-821f-57643572dda7", "state": 7, "sourcePages": [{ "docPageNum": 1, "sourceFileId": "638be1e3-e24f-11ea-821f-57643572dda7", "sourceFilePageNum": 2 }] }, { "containsVerifiedFields": false, "containsComments": false, "ownedByCurrentUser": false, "ownedByCurrentUserInDifferentBatch": false, "docId": "caa7616b-e7bc-11ea-8224-57643572dda7", "labelId": "b7222272-e259-11ea-821f-57643572dda7", "state": 5, "sourcePages": [{</pre>

API Reference Guide

	<pre> "docPageNum": 1, "sourceFileId": "638be1e3-e24f-11ea-821f-57643572dda7", "sourceFilePageNum": 5 }] </pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
docId	string	Document unique identifier generated by the system.
labelId	string	The labelId of the Category the file was processed in.
state	string	Status of the document.
sourcePages	array	List of source file pages in the document.
docPageNum	string	Page number in document.
sourceFileId	string	Unique identifier of a batch of documents assigned to one user.
sourcePageNum	string	Page number in source file.
containsVerifiedFields	boolean	Indicates if the document has verified fields.
containsComments	boolean	Indicates if the document has user comments.
ownedByCurrentUser	boolean	Indicates if the document is assigned to the current user.
ownedByCurrentUserInDifferentBatch	boolean	Indicates if the document belongs to the current batch.

Mark Document Delivered

Advance *finished* document to 'Delivered' status to indicate that exports have been received.

Request

Method	URL
POST	/api/v2/docs/deliver

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Body	docIds	["c72012a0-f174-11ea-822b-57643572dda7", "c72012a1-f174-11ea-822b-57643572dda7"]	Document unique identifier generated by the system.

Response

Status	Response
200	OK
400	Bad request
401	Unauthorized

View Finished Document

A presigned URL gives access to the finished document specified, granting the recipient access to review the finished document directly in SortSpoke.

Request

Method	URL
GET	/api/v2/presigned/document/{docId}

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	docId	string	Document unique identifier generated by the system.

Response

Status	Response
200	<pre>{ "generatedDate": "2021-01-01T01:37:20.0714807Z", "expiryDate": "2021-01-01T02:37:20.0714807Z", "returnUrl": "https://auth.sortspoke.com/Account/OneTimeAuthTokenLogin?token=5zLmvPHeP_KdVvHj.M8MRg-dJwpgyRScA-gHSxf37CDVrGmDqXid8PuCSOnfts63PFoCEmwtKH5MnM0PjZ9ty6RlyfOYUr3ZXBB-y8YADj7LDzSKQczjkRCfD1-hBpwej3h02wGxIUnGzqfJPrntxhwxBwv1wxDk4hJf4gGIENn6h5MUEMJ_SvNzpCzkLloV24dBBFLVmQ0wZc6N2S3bMG3CRubPvtovAvJrIatHhhCWaZ4yDhN3sB5Cze4pI1CUIcl0mbC_yJLdyNF62MQXkd5PU_Z_8Z1-_JnQn7Kwt8d-gx7NnGq3iHuymkTDop14phfUxXfi-oYRk51Y7xtTOS80bXafY3ver6SyyuNz791SZWMDDuftH0aYx9gzVmjkOLeEGT4LCsYJ1iVg4c5PL2GE5HsLW6dVrS_0BIvSWB1Js8RSv5zGSq14iPGbwBR_b5FnKR a2D9CRAFZ2F3TFETkvf.7WQXJICFHSd8KvMfWq5muw" }</pre>
400	Bad request
401	Unauthorized

Split

Split Sourcefile

Split sourcefile into multiple documents to be processed individually in SortSpoke.

Request

Method	URL
POST	api/v2/sourceFiles/{sourceFileId}/split

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	sourceFileId	string	SourceFile unique identifier generated by the system at upload. Must be sent as part of the route.
Body	docPageRanges	array	Contains labelId & sourceFilePageNums.
Body	labelId	string	Unique identifier for category to which document should be sorted.
Body	sourceFilePageNums	array	Page numbers from original sourcefile, separated by commas. Pages must be contiguous.

Response

The response contains verified data for a specific document in Excel format (e.g. XLSX).

Status	Response
200	<pre>{ "sourceFileId": "20597826-6082-11e9-81fd-5f258a7bb38a", "documents": [{ "docId": "dd8e449f-eed1-11e8-8236-5f1a72b316fe", "labelId": "f2cac21e-7c72-40b2-8a79-922670c66182", "pages": [1, 2] }] }</pre>

API Reference Guide

	<code>] }</code>
400	Bad request
401	Unauthorized

Name	Data Type	Description
sourceFileId	string	SourceFile identifier.
docId	string	DocumentId generated by the system.
labelId	string	Document category (label) identifier.
pages	array	List of sourcefile page numbers.

Named Batches

Create Batch

Request

Method	URL
POST	api/v2/projects/{projectId}/batches
POST	api/v2/streams/{streamId}/batches

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	projectId	string	ProjectId to which the batch should be created. Batch will be created in default stream.
Route	streamId	string	StreamId to which the batch should be created. Can target default or custom streams.
Body	BatchName	"BatchName" : "string"	Batch names must be unique. Excludes finished batches.
Body	AssigneeUserIdOrUserName	"AssigneeUserIdOrUserName" : "fb3fd0e6-6ca3-4551-9e12-2e1bf8fe8b96"	[optional] Accepts UserId (string) or UserName/Email (string). If 'null' or not included, the batch will remain unassigned and can be claimed by any user when in 'filled' state.

Response

The response contains a single batchId that is used to refer to the specific **Named Batch** in subsequent API calls.

Status	Response

API Reference Guide

200	"624272e2-9ec8-11ea-8275-5793c2ae4c49"
400	Bad request
401	Unauthorized

Upload File to Batch

Request

Method	URL
POST	api/v2/batches/{batchId}/upload

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	batchId	string	BatchId that the uploaded document belongs to. Must be sent as part of the route.
Query String	labelId	string	[optional] Sorts a document to a specific document category. When batched to a user, the document will advance automatically to the Extract tab.
Body	file	multipart/form-data	Document data in binary form.

Response

The response contains the unique DocId of the uploaded file that is used to refer to the **Document** in subsequent API calls. It also contains a file name and the size (length) of the uploaded file.

Status	Response
200	<pre>[{ "docId": "00000001-0000-0000-0000-000000000000", "filename": "/user@domain.com/filename.pdf", "size": 137290, "sourceFileId": "00000002-0000-0000-0000-000000000000" }]</pre>
400	Bad request
401	Unauthorized

API Reference Guide

Name	Data Type	Description
docId	string	Document unique identifier generated by the system.
filename	string	Original source file name.
size	int	Document source file size (length).
sourceFileId	string	SourceFile unique identifier generated by the system.

Assign Batch

Request

Method	URL
PATCH	api/v2/batches/{batchId}/assign

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	batchId	string	BatchId to be assigned. Must be sent as part of the route.
Body	userId	"string"	UserId of user to be assigned batch.

Response

Status	Response
200	OK
400	Bad request
401	Unauthorized

Update Batch Status

Request

Method	URL
PATCH	api/v2/batches/{batchId}

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	batchId	string	BatchId that the uploaded document belongs to. Must be sent as part of the route.
Body	batchName	"batchName": "string"	BatchName as set at time of creation. Must be included. Update allowed.
Body	state	"state": integer	Current state of batch. See batch status codes for reference. Values allowed: 10, 20, 30.

Response

Status	Response
200	OK
400	Bad request
401	Unauthorized

Get Batches List

Get a list of **Named Batches** for a project.

Request

Method	URL
POST	api/v2/projects/{projectId}/batches/list
POST	api/v2/streams/{streamId}/batches/list

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	projectId	string	ProjectId for which all batches should be returned. Will return data for the Default Stream.
Route	streamId	string	StreamId for which all batches should be returned. Can specify default or custom streams.
Body	Query	["string"]	Search BatchName for a string of text.
Body	StateFilter	"StateFilter": { "FilterValues":[50] },	Status of the Named Batch (see Batches Status Codes for reference)
Body	Limit	"Limit":1000,	Maximum number of results to return (maximum is 1000)
Body	PageNumber	"PageNumber":1,	Page number provides you a way to see more than the first 1000 results.
Body	Sorting	"Sorting": [{ "FieldName" : "FinishedDate", "Type" : "Descending" }]	Specify the sort type & order of the output.

Response

The response contains the list of **Named Batches** found under the project.

API Reference Guide

Status	Response
200	<pre>{ "itemCount": 1, "pageSize": 25, "offset": 0, "data": [{ "batchId": "ee5c2c4d-8e6d-11ea-82ba-5f4a74c154c7", "batchName": "Named Batch", "docCount": 15, "sortingDocCount": 0, "extractingDocCount": 0, "state": 50, "userId": "253c8d5a-3faa-4924-8676-dfc59fc74cf5", "isCloudImportedBatch": false, "creationDate": "2020-01-01T01:15:11.46Z", "finishedDate": "2020-01-01T01:45:11.46Z", "isDefault": false }], "pageCount": 1 }</pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
itemCount	string	Total number of records returned.
pageSize	string	The limit of the number of results.
offset	string	Relates to PageSize and PageCount.
data	array	List of matching named batches in project.
docId	string	Document unique identifier generated by the system.
batchId	string	Unique identifier of a batch of documents assigned to one user.
batchName	string	Name given to batch.
docCount	int	Total number of documents assigned to batch.
sortingDocCount	int	Number of documents in Sorting state.
extractingDocCount	int	Number of documents in Extracting state.

API Reference Guide

state	int	Status of the document.
userId	string	User who finished the batch.
isCloudImportedBatch	boolean	Indicates whether the batch was created via cloud storage import.
creationDate	string	Batch's creation date.
finishedDate	string	Batch's completion date.
isDefault	boolean	Indicates if the batch was system-generated.
triageBucketId	string	Indicates if the batch was system-generated.

Get Document List for Batch

Request

Method	URL
GET	api/v2/batches/{batchId}/docs

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	batchId	string	BatchId that the active document belongs to. Must be sent as part of the route.
Query	state	string	[optional] Specify a document state to filter document list returned (e.g. state=7 will only return finished documents).
Query	fromFinishedDate	string	[optional] Specify a date range 'start' from which to filter document list by Finished Date (e.g. fromFinishedDate=2020-01-01 or fromFinishedDate=2019-12-25T06:00:00)
Query	toFinishedDate	string	[optional] Specify a date range 'end' to filter document list by Finished Date (e.g. toFinishedDate=2020-06-30 or ftoFinishedDate=2020-12-31T23:59:00)

Response

The response contains the unique DocId of the uploaded that is used to refer to the **Document** in subsequent API calls. It also contains the document's current [state](#).

Status	Response
200	<pre>[{ "docId": "15f0922b-a1b5-11ea-8279-5793c2ae4c49", "state": 3 }, { "docId": "15f09239-a1b5-11ea-8279-5793c2ae4c49", "state": 7 }]</pre>
400	Bad request

API Reference Guide

401	Unauthorized
-----	--------------

Name	Data Type	Description
docId	string	Document unique identifier generated by the system.
state	int	Document state .

Mark Batch Delivered

Advance *finished* batches and related *finished* documents to 'Delivered' status to indicate that exports have been received.

Request

Method	URL
POST	/api/v2/batches/deliver

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Body	batchIds	array	List of batch unique identifiers generated by the system.

Response

The response contains the unique webhook subscription ID and encrypted secret value.

Status	Response
200	OK
400	Bad request
401	Unauthorized

Downloads

Document Export (JSON)

Verified data for a specific document is downloaded in the project's export format (e.g. JSON).

Request

Method	URL
GET	api/v2/downloads/docs/{docId}/export_file

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	docId	<code>string</code>	Document unique identifier generated by the system.
Header	Accept	<code>application/json</code>	<code>[optional]</code> Allows download in JSON format.

Response

The response contains verified data for a specific document in the project's export format (e.g. JSON).

Status	Response
200	<pre>{ "ExportFormat": "JsonV2", "ProjectId": "3frw3fw3r-4fwfsw4rwr-fwf4wrw3rwf-dfwfw3w3", "ProjectName": "My Project", "DocId": "r4fefwafw-fwfes4-f3wafasefqa-ggsfw3f", "SrcFilename": "/inbox/filename.pdf", "DstFilename": "/Outbox/Category/filename.pdf", "DocClass": "Agreement", "DocClassId": "454tw-wrw3w4tw4-6urhryr65r-egfsw34", "ReceivedDate": "2017-09-10T17:22:17.48Z", "ExportedDate": "2017-09-11T17:33:57.684224Z", "Fields": [{ "Name": "Heading", "Value": "An Agreement of Purchase and Sale", "FieldId": "4ew5tf-3rwr4654-f3rfa3r-4564et" }, { "Name": "First Party", "Value": "John Doe", "FieldId": "45wrw-4twtr4ey-5et4wtkjg-4et4edf" }, { "Name": "Second Party", "Value": "Smith, Doe and Jones LLP", "FieldId": "3wrwf43-4t4eye5gw-wf3t434uyr-et4ewf" }] }</pre>
400	Bad request
401	Unauthorized

API Reference Guide

Name	Data Type	Description
ExportFormat	string	Requested export format.
ProjectId	string	ProjectId that the document belongs to.
ProjectName	string	Project name that the uploaded document belongs to.
DocId	string	Document unique identifier generated by the system.
SrcFilename	string	Document source file generated by the system.
DstFilename	string	Document destination filename and path.
DocClass	string	Document category (label) name.
DocClassId	string	Document category (label) identifier.
ReceivedDate	string	Document upload date.
ExportedDate	string	Document exported date.
Fields	array	List of fields found in the document.

Document Export (Excel)

Verified data for a specific document is downloaded in Excel format (e.g. XLSX).

Request

Method	URL
GET	/api/v2/downloads/ExportFinishedDoc/{docId}

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	docId	string	Document unique identifier generated by the system. Must be sent as part of the route.

Response

The response contains verified data for a specific document in Excel format (e.g. XLSX).

Status	Response
200	This method returns a binary file.
400	Bad request
401	Unauthorized

Bulk Export (JSON)

Verified data for a list of documents is downloaded in the project's export format (e.g. JSON).

Request

Method	URL
POST	/api/v2/downloads/export_files

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
FormData	docIds[]	string	List of Document unique identifiers generated by the system.

Response

The response contains a binary file in ZIP format.

Status	Response
200	This method returns a binary file.
400	Bad request
401	Unauthorized

Bulk Export (Excel)

Verified data for a list of documents is downloaded in Excel format (e.g. xlsx).

Request

Method	URL
POST	/api/v2/downloads/export_files/Excel

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
FormData	docIds[]	string	List of Document unique identifiers generated by the system.

Response

The response contains a binary file in ZIP format.

Status	Response
200	This method returns a binary file.
400	Bad request
401	Unauthorized

Original Document (PDF)

Original document is downloaded in PDF format.

Request

Method	URL
GET	/api/v2/downloads/doc/{docId}

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	docId	string	Document unique identifier generated by the system. Must be sent as part of the route.

Response

The response contains a binary file for a specific document in PDF format.

Status	Response
200	This method returns a binary file.
400	Bad request
401	Unauthorized

Batch Export (JSON)

Verified data for documents assigned to specific batch document is downloaded in the project's export format (e.g. JSON).

Request

Method	URL
GET	api/v2/batches/{batchId}/export_file

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	batchId	string	Batch unique identifier generated by the system. Must be sent as part of the route.
Header	Accept	application/json	[optional] Allows download in JSON format.

Response

The response contains verified data for a specific document in the project's export format (e.g. JSON).

Status	Response
200	<pre>{ "ProjectId": "00000000-0000-0000-0000-000000000000", "ProjectName": "{projectName}", "StreamId": "00000000-0000-0000-0000-000000000000", "StreamName": "{streamName}", "BatchId": "00000000-0000-0000-0000-000000000000", "BatchName": "{batchName}", "CreationDate": "2024-01-01T00:00:00.000Z", "FinishedDate": "2024-01-01T00:00:00.000Z", "UserId": "00000000-0000-0000-0000-000000000000", "UserName": "user@domain.com", "TriageBucketName": "{bucketName}", "TriageBucketId": "00000000-0000-0000-0000-000000000000", "ExportFormat": "JsonV2", "ExportPathFilename": "SortSpokeExport {exportDate} {batchName}.json", "ExportedDate": "2024-01-01T00:00:00.000Z", "ExportDocuments": [] }</pre>

API Reference Guide

400	Bad request
401	Unauthorized

Name	Data Type	Description
ExportFormat	string	Requested export format.
ExportPathFilename	string	Batch export destination filename and path.
ProjectId	string	ProjectId that the batch belongs to.
ProjectName	string	Project name that the batch belongs to.
StreamId	string	StreamId that the batch belongs to.
StreamName	string	Stream name that the batch belongs to.
BatchId	string	BatchId for the batch requested.
BatchName	string	Batch name for the batch requested.
SrcFilename	string	Document source file generated by the system.
UserId	string	UserId for user assigned to the batch.
UserName	string	User name for user assigned to the batch.
TriageBucketId	string	BucketId for Triage priority assigned to the batch.
TriageBucketName	string	Bucket name for Triage priority assigned to the batch.
CreationDate	string	Batch creation date.
FinishedDate	string	Batch finished date.
ExportedDate	string	Batch exported date.
ExportDocuments	array	List of finished documents found in the batch.

TriageAI

Get Triage Results

Provides a step-by-step breakdown of the prioritization process, including individual outcomes for each rule applied to a batch.

Request

Method	URL
GET	/api/v2/projects/{projectId}/batch/{batchId}/triageResults

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	projectId	string	Unique identifier of the project to which the batch belongs.
Route	batchId	string	Unique identifier of the batch being queried.

Response

The response contains detailed inputs, rules and final output (priority) assigned to batch.

Status	Response
200	<pre>{ "inputs": { "LabelId:fed2b3c6-4353-ee11-9e5b-5f9008cd344c": [{ "documentName": "document1.pdf", "documentState": 5, "docId": "5c31cce4-e19d-ef11-b48e-5f9008cd344c", "mergedRanges": [{ "valueId": "b7df7de0-3eab-49de-a752-9a954af57342", "fieldId": "c619b9c6-4353-ee11-9e5b-5f9008cd344c", "confidence": 1.0, "predictedText": null, "originalText": "2012", "fieldValueType": "Prediction" }] } },]</pre>

API Reference Guide

	<pre> "outputs": { "BucketId": "8acae842-32e5-4352-89e9-4006ddf66208" }, "rules": [{ "isSuccess": true, "expressionType": "IsGreaterThan", "compareValue": "2000", "path": "LabelId:fed2b3c6-4353-ee11-9e5b-5f9008cd344c.FieldId:c619b9c6-4353-ee11-9e5b-5f90 08cd344c.Value", "rules": [], "operator": null, "actions": { "onSuccess": [{ "name": "AssignBucketIfNotSet", "value": "8acae842-32e5-4352-89e9-4006ddf66208" }], "onFailure": [{ "name": "AssignBucketIfNotSet", "value": "ca23970a-2aee-4c8c-b793-9dfcb24f8a37" }, { "name": "Exit", "value": true }] }] } </pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
inputs	object	Predicted & verified values that will be used in the evaluation, grouped by category (label).
outputs	object	Final outcome. The priority (bucket) assigned to the batch.
rules	array	Each rule and its individual outcome.

Rerun Triage

Sends a batch of documents back through the triage process to re-determine its priority based on current document values and triage rules.

Request

Method	URL
POST	/api/v2/projects/{projectId}/batch/{batchId}/triage

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	projectId	string	Unique identifier of the project to which the batch belongs.
Route	batchId	string	Unique identifier of the batch being actioned.

Response

Status	Response
200	OK
400	Bad request
401	Unauthorized

Get Buckets

Returns list of **buckets** (submission priorities) for a project.

Request

Method	URL
GET	/api/v2/projects/{projectId}/trriage/buckets

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	projectId	string	Unique identifier of the project being queried.

Response

Status	Response
200	<pre>{ "buckets": [{ "bucketId": "8acae842-32e5-4352-89e9-4006ddf66208", "name": "High", "colorHex": "#3a9b0d", "isDefault": false }, { "bucketId": "b703f763-6c8f-4f33-9bbe-608f9303ce2b", "name": "Low", "colorHex": "#800020", "isDefault": false }, { "bucketId": "e5479b23-4578-4c1b-a8a4-c906289e3932", "name": "Unknown", "colorHex": "#aaaaaa", "isDefault": true }] }</pre>
400	Bad request
401	Unauthorized

API Reference Guide

Name	Data Type	Description
bucketId	<code>string</code>	Unique identifier of bucket.
name	<code>string</code>	Name of submission bucket.
colorHex	<code>string</code>	Colour assigned to bucket.
isDefault	<code>bool</code>	Indicates system-generated bucket that serves as catch-all should triage result be undeterminable.

Assign Bucket

Manually sets the **bucket** (submission priority), overriding any priority assigned by triage.

Request

Method	URL
PATCH	/api/v2/batches/{batchId}/bucket/{bucketId}

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	batchId	string	Unique identifier of the batch being actioned.
Route	bucketId	string	Unique identifier of the bucket to be set.

Response

Status	Response
200	OK
400	Bad request
401	Unauthorized

Lookup Data

Get Lookup Schemas

Get lookup schemas for an account.

Request

Method	URL
GET	api/v2/internal/admin/accounts/{acctId}/lookup/schemas

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	acctId	string	Unique identifier of the account being queried.

Response

The response contains the list of lookup schemas assigned to the account.

Status	Response
200	<pre>{ "acctId": "00000000-0000-0000-0000-000000000000", "lookupSchemas": [{ "lookupSchemaId": "00000000-0000-0000-0000-000000000000", "acctId": "00000000-0000-0000-0000-000000000000", "fields": [{ "sourceFieldName": "Column 1", "friendlyFieldName": "Column 1", "index": 1 }, { "sourceFieldName": "Column 2", "friendlyFieldName": "Column 2", "index": 2 }], "schemaName": "{schemaName}", "isInternallyProvided": false, "totalRowCount": 999 }] }</pre>

API Reference Guide

	}
400	Bad request
401	Unauthorized

Name	Data Type	Description
acctId (top level)	string	Unique identifier of the account being queried.
lookupSchemas	array	List of labels related to the specified project.
lookupSchemaId	string	Unique identifier of the lookup schema.
acctId (array)	string	Unique identifier of the account to which the lookup schema belongs.
schemaName	string	Name given to the lookup schema.
isInternallyProvided	bool	When true, indicates a lookup schema that is managed by SortSpoke.
totalRowCount	int	Number of rows of data in the schema.
fields	array	Column data in lookup schema.
sourceFieldName	string	Name given to column of data.
friendlyFieldName	string	Column data name to display in user interface.
index	int	Identifies the column's location in the schema.

Create Lookup Schema

Creates a lookup schema and saves all data rows to the database.

Request

Method	URL
POST	api/v2/internal/admin/accounts/{acctId}/lookup/schema

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	acctId	string	Unique identifier of account where the lookup schema should be created.
Query	schemaName	string	[optional] Specify a schema name. Filename will be used if schemaName is not specified.
Body	file	multipart/form-data	Lookup data in binary form. CSV files only. Maximum 16 columns. Maximum 25 MB limit per request.

Response

The response contains the unique identifier of the lookup schema created.

Status	Response
200	<pre>{ "lookupSchemaId": "00000000-0000-0000-0000-000000000000", "importedRowCount": 987 }</pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
lookupSchemaId	string	Unique identifier of lookup schema generated by the system.
importedRowCount	int	Number of rows of data created.

Replace Lookup Schema

Allows an existing lookup schema to be modified by **replacing** all of its data.

Request

Method	URL
PUT	api/v2/internal/admin/accounts/{acctId}/lookup/schema/{lookupSchemaId}

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	acctId	string	Unique identifier of account to which the lookup schema belongs.
Route	lookupSchemaId	string	Unique identifier of lookup schema to be modified.
Query	schemaName	string	[optional] Specify a new schema name. Schema name will not be updated if not specified.
Body	file	multipart/form-data	Lookup data in binary form. CSV files only. Maximum 16 columns. Maximum 25 MB limit per request.

Response

The response contains the unique identifier of the lookup schema modified.

Status	Response
200	<pre>{ "lookupSchemaId": "00000000-0000-0000-0000-000000000000", "importedRowCount": 987 }</pre>
400	Bad request
401	Unauthorized

Name	Data Type	Description
lookupSchemaId	string	Unique identifier of the lookup schema modified.
importedRowCount	int	Number of rows of data created.

Append Lookup Schema

Allows an existing lookup schema to be modified by **appending** new data to existing data.

Schema of existing data must match schema of new data being created. If adding, deleting or renaming columns in the schema, the **Replace** endpoint should be used.

Duplicate data rows will be created, if present.

Request

Method	URL
PATCH	api/v2/internal/admin/accounts/{acctId}/lookup/schema/{lookupSchemaId}/append

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	acctId	string	Unique identifier of account to which the lookup schema belongs.
Route	lookupSchemaId	string	Unique identifier of lookup schema to be modified.
Query	schemaName	string	[optional] Specify a new schema name. Schema name will not be updated if not specified.
Body	file	multipart/form-data	Lookup data in binary form. CSV files only. Maximum 16 columns. Maximum 25 MB limit per request.

Response

The response contains the unique identifier of the lookup schema modified.

Status	Response
200	<pre>{ "lookupSchemaId": "00000000-0000-0000-0000-000000000000", "importedRowCount": 987 }</pre>
400	Bad request
401	Unauthorized

API Reference Guide

Name	Data Type	Description
lookupSchemaId	string	Unique identifier of the lookup schema modified.
importedRowCount	int	Number of new rows of data appended.

Delete Lookup Schema

Deletes a lookup schema and related records.

Request

Method	URL
DELETE	api/v2/internal/admin/accounts/{acctId}/lookup/schema/{lookupSchemaId}

[Authorization](#) header must be sent with this request.

Parameters

Type	Name	Data Type	Description
Route	acctId	string	Unique identifier of account to which the lookup schema belongs.
Route	lookupSchemaId	string	LookupSchemaId to be deleted.

Response

Status	Response
200	OK
400	Bad request
401	Unauthorized

Conventions

- Client - Client application.
- Status - HTTP status code of response.
- All the possible responses are listed under 'Responses' for each method.
- All request parameters are mandatory unless explicitly marked as [optional]
- The type of values accepted for a request parameter are shown the values column like this [10|<any number>]. The | symbol means OR. If the parameter is [optional], the default value is shown in blue bold text, as **10** is written in [10|<any number>].

API Status Codes

All status codes are standard HTTP status codes. The below ones are used in this API.

2xx - Success of some kind

4xx - Error occurred in client's part

5xx - Error occurred in server's part

Status Code	Description
200	OK
400	Bad request
401	Authentication failure
403	Forbidden
404	Resource not found
405	Method Not Allowed
500	Internal Server Error
501	Not Implemented
503	Service Unavailable

SortSpoke Status Codes

Documents

The status codes below are referred to as the Document State in this API.

*NOTE: This is a temporary state pending the completion of a background task.

	Status	Code	Description
*	Preprocessing	1	Document has been received by SortSpoke. It is being preprocessed.
*	Predicting Sort	2	Document has been preprocessed. It is queued for sorting predictions.
	Sorting	3	Document is ready to be sorted into a document category by a user.
*	Reprocessing pages	310	Document page(s) being reprocessed at user's request (e.g. page rotation).
*	Predicting Values	4	Document has been sorted. It is queued for field predictions.
	Extracting	5	Document is ready for data extraction by a user.
*	Reprocessing pages	510	Document page(s) being reprocessed at user's request (e.g. page rotation).
*	Exporting	6	Document has been accepted. Document data is being exported.
	Finished	7	Document is completed. Export file has been generated.
	Delivered	8	User has updated status to indicate export has been received.
	Preprocessing Error	1002	File failed to complete preprocessing.
	ExportError	1004	Document had an error during export. Please contact SortSpoke for assistance.
	Rejected	1005	Document was rejected by a user.
	Quarantine	1006	Document's source file failed antivirus scan on import.
	DeletedDuringSplit	1100	Document was removed during split, or a document's first page changed during split requiring the document to be regenerated
	Excel Unpacked	1200	Imported XLSX file has been unpacked by worksheet into separate documents.

API Reference Guide

	Pending Rejection	91005	Document is marked for rejection. Reject process will move the file in the storage provider and mark it Rejected, if successful.
--	-------------------	-------	--

Sourcefiles

The status codes below are referred to as the Sourcefile State in this API.

*NOTE: This is a temporary state pending the completion of a background task.

	Status	Code	Description
*	Downloaded	100	File was received and is in the preprocessing queue.
	Preprocessed	200	File is ready.
*	Pending Extract	250	All related documents are in a Finished state. The source file will be updated shortly.
	Finished	300	All documents associated with the file have been finished.
	Delivered	310	User has updated status to indicate export has been received.
	Excel Unpacked	320	Imported XLSX file has been unpacked by worksheet into separate source files.
	Preprocessing Error	400	File failed to complete preprocessing.
	Quarantine	401	Source file failed antivirus scan on import.
	Replaced	1300	When a file downloaded from a cloud storage provider has been updated, we move the original source file to this state.

Batches

The status codes below are referred to as the Batch State in this API.

Status	Code	Description
Filling	10	Batch is receiving documents.
Filled	20	Batch is filled and ready to be claimed.
Claimed	30	A user is assigned to the batch. Documents can now be processed.
Finished	50	All documents in the batch have been finished, either accepted or rejected.
Delivered	60	User has updated status to indicate export has been received.
Merged	90	TBD
Aborted	100	For some reason we abandoned the batch, isn't an indication of what happened to the docs in it

Postman Setup

What is Postman?

[Postman](#) is a powerful HTTP client for testing web services. Postman makes it easy to test, develop and document APIs by allowing users to quickly put together both simple and complex HTTP requests.


Postman can be downloaded [here](#).

Postman Configuration

The guide below will help you set up Postman for use with SortSpoke with the most common use-case examples.

Download Setup Files

1. Go to our API Reference Guide support page:
<https://www.sortspoke.com/api-reference-guide>
2. Download the SortSpoke Postman Collection archive:
 - a. `_SortSpoke Public API.postman_collection.json`
 - b. `_SortSpoke Public API.postman_environment.json`

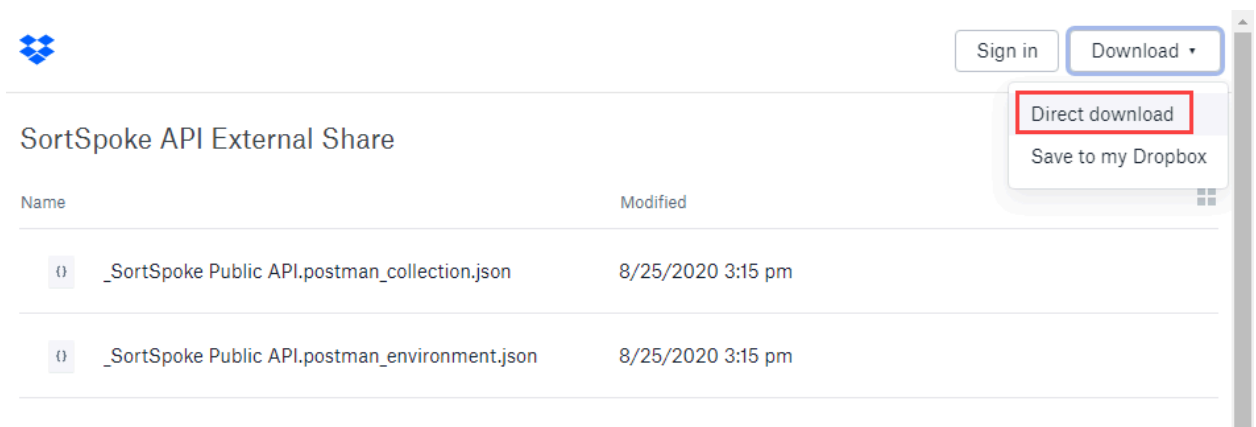


SortSpoke API External Share

Name	Modified
<code>_SortSpoke Public API.postman_collection.json</code>	8/25/2020 3:15 pm
<code>_SortSpoke Public API.postman_environment.json</code>	8/25/2020 3:15 pm

3. Extract the ZIP file.

Import Setup Files


1. In Postman, click on the 'Import' button.
2. On the File tab, click 'Upload Files'.
3. Select both JSON files.

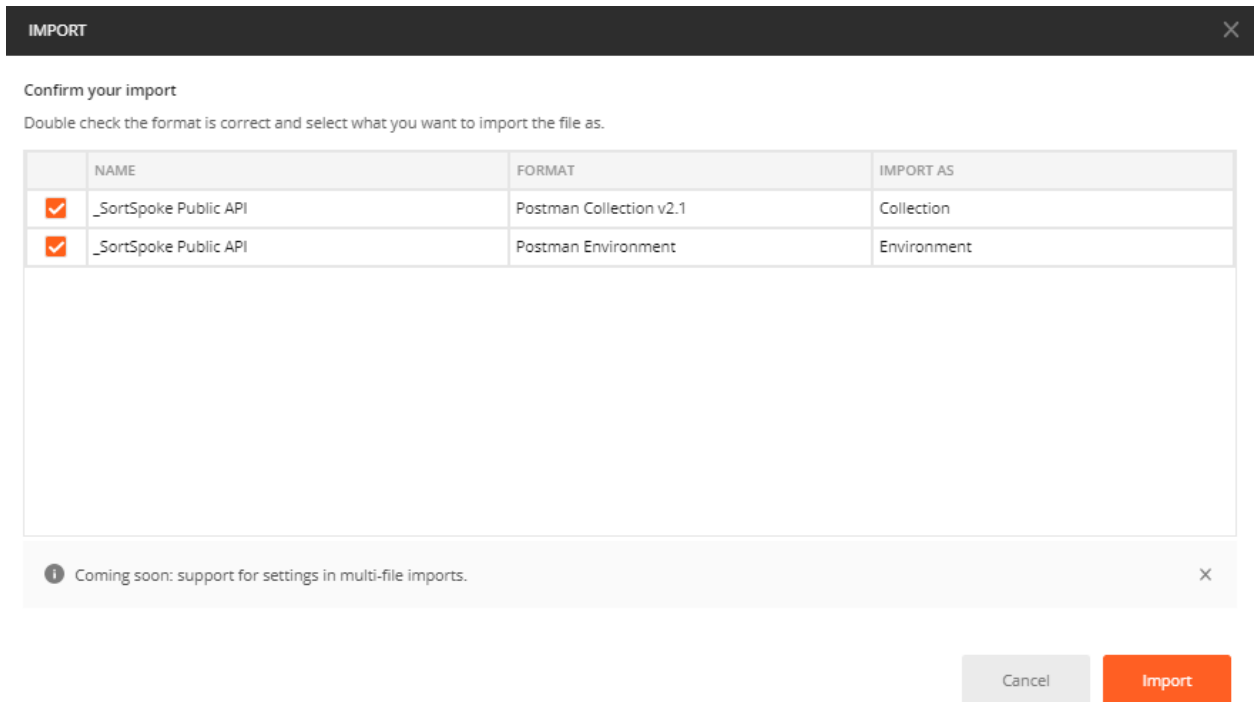

4. Click 'Import'.
5. In the left sidebar, confirm that a collection called **_SortSpoke Public API** has been added to your workspace.
6. Click on any request to open it in the main workspace.

Set Your Variables


1. Select the '_SortSpoke Public API' environment in the upper-right of window
2. Click on the 'Quick Look' icon.
3. Click 'Edit.'

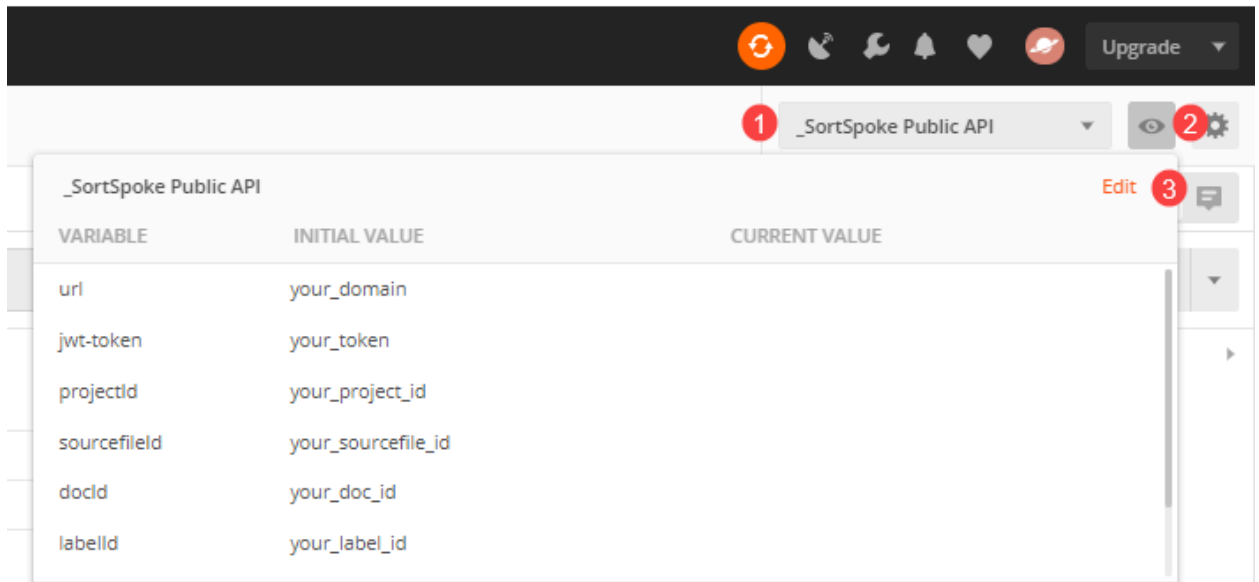

4. Set a value for your **URL** variable:
 - a. If access the US data centre, use: <https://api.sortspoke.com>
 - b. If accessing the Canada data centre, use: <https://api.ca.sortspoke.com>
 - c. If accessing the Europe data centre, use: <https://api.eu.sortspoke.com>
5. Set a value for your **jwt-token**:
 - a. Create a token in Admin → Users → [user profile] → API Tokens.
[Click for detailed instructions](#). Or...
 - b. Contact your administrator to have an API key generated for you.
6. Click 'Update'.

Send Your First API Call


1. In the Projects folder, open the Get Projects request
2. Click 'Send'
3. If you receive a 200 OK response, you are set up.

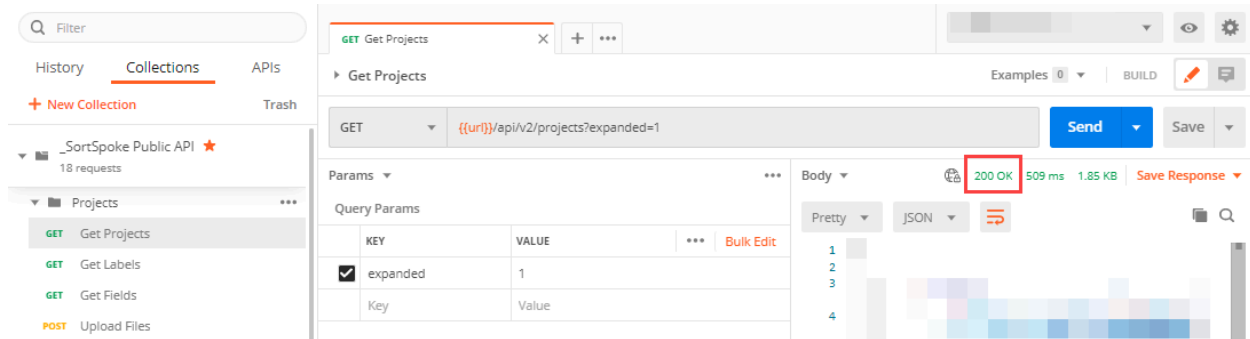

Authorization Setup

Authorization has been pre-configured in the templates imported. This configuration can be confirmed by following these steps.


1. In the left sidebar, click 'Edit' in the 'More Actions' dropdown menu of the 'SortSpoke' collection.

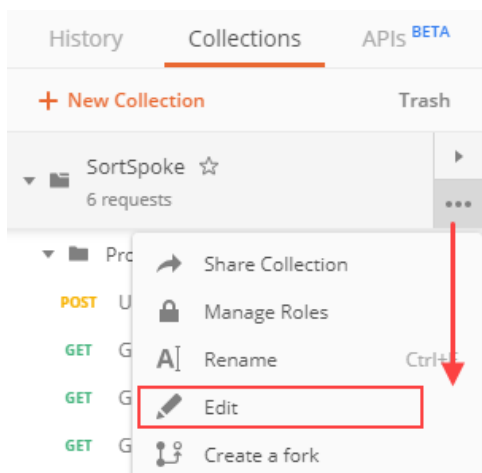

2. Confirm configuration on the Authorization tab:
 - a. **Type** dropdown selection should be 'Bearer Token'

API Reference Guide

- b. **Token** value should match the variable as setup in the Environment configuration; in this example, the value should be: `{{jwt-token}}`

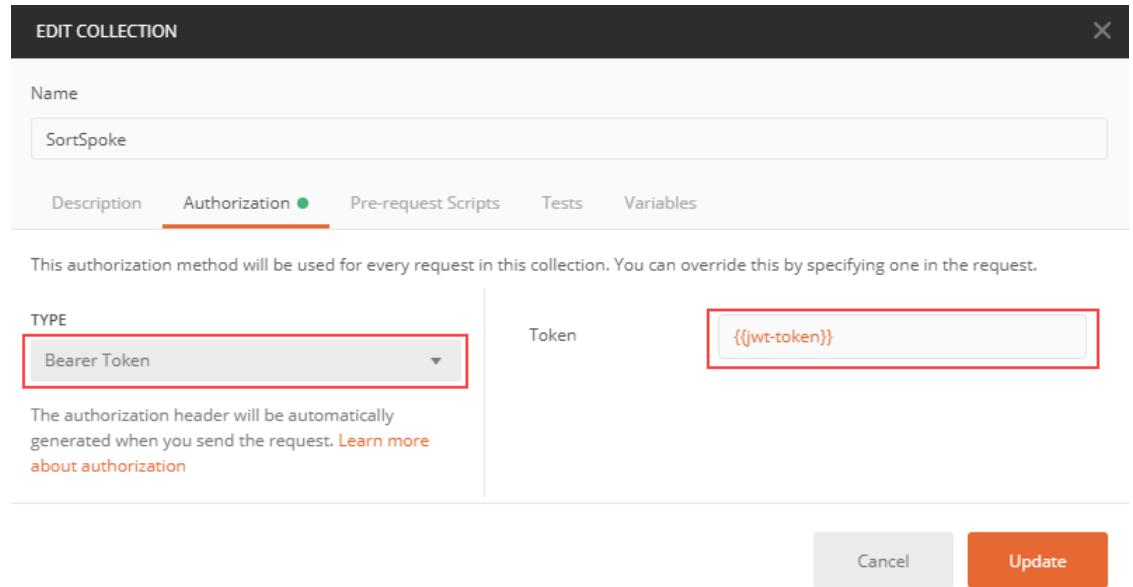

EDIT COLLECTION [X]

Name
SortSpoke

Description **Authorization** Pre-request Scripts Tests Variables

This authorization method will be used for every request in this collection. You can override this by specifying one in the request.


TYPE
Bearer Token

Token
{{jwt-token}}

The authorization header will be automatically generated when you send the request. [Learn more about authorization](#)

Cancel Update

3. Open any API request in the SortSpoke collection.
4. Confirm configuration on the Authorization tab:
 - a. **Type** dropdown selection should be 'Inherit auth from parent'.

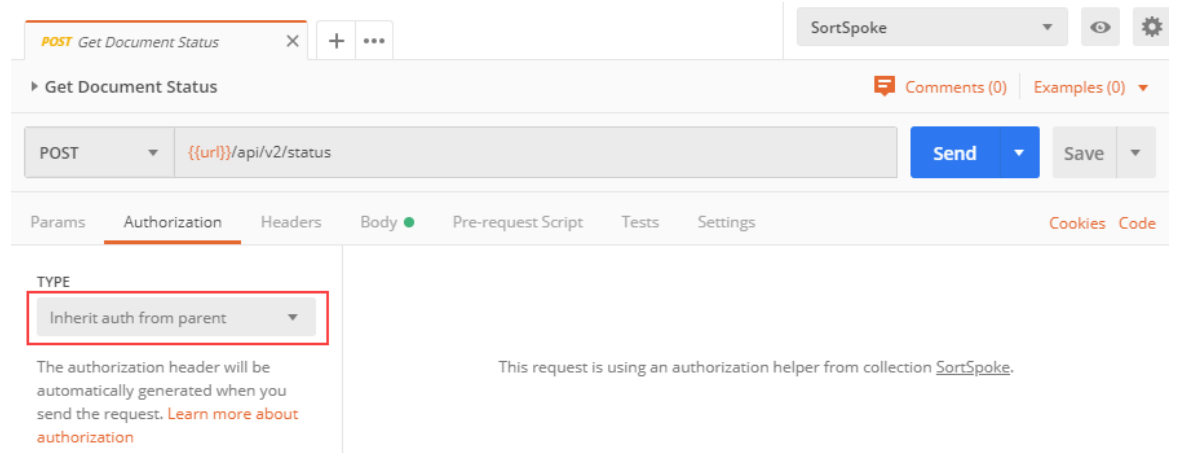

SortSpoke [X] [+] [...]

POST Get Document Status

Comments (0) Examples (0)

POST {{url}}/api/v2/status Send Save

Params **Authorization** Headers Body Pre-request Script Tests Settings Cookies Code

TYPE
Inherit auth from parent

The authorization header will be automatically generated when you send the request. [Learn more about authorization](#)

This request is using an authorization helper from collection [SortSpoke](#).